


数量計算書

高畑萩原線

		計算書					計算書		
測点	点間距離	打換え工 t=5cm			点間距離				
		断面	平均	面積		断面	平均	面積	
No.16		三俣11号線1号橋							
No.16+2.40	2.4	4.60							
No.17	17.6	3.90	4.25	74.8					
No.18	20.0	3.00	3.45	69.0					
No.19	20.0	3.00	3.00	60.0					
No.20	20.0	3.50	3.25	65.0					
No.21	20.0	3.20	3.35	67.0					
No.21+15.9	15.9	3.30	3.25	51.7					
No.21+15.9'		5.10							
No.22	4.1	5.20	5.15	21.1					
No.22+1.70	1.7	5.90	5.55	9.4					
No.22+7.40	5.7	6.50	6.20	35.3					
No.23	12.6	5.30	5.90	74.3					
No.24	20.0	5.00	5.15	103.0					
No.25	20.0	5.30	5.15	103.0					
No.26	20.0	5.20	5.25	105.0					
No.27	20.0	5.20	5.20	104.0					
No.28	20.0	5.30	5.25	105.0					
No.28+4.80	4.8	5.90	5.60	26.9					
No.28+7.20	2.4	8.90	7.40	17.8					
No.28+9.00	1.8	12.90	10.90	19.6					
No.28+10.90	1.9	20.00	16.45	31.3					
No.28+16.40	5.5	Aブロック数量表参照		92.8					
No.29	3.6								
No.29+10.00	10.0	3.30							
No.30	10.0	3.10	3.20	32.0					
								m2	
小計	280.0			1268.0	累計			1268.0	
累計	280.0		≒	1268.0			≒	1268.0	

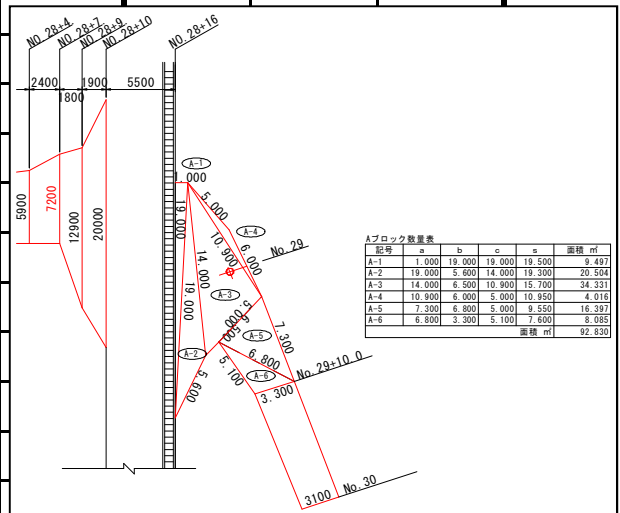

数量計算書

高畑萩原線

名称		数量	単位	備考
舗装打換え工				
土工			1 式	NO.16=4.6m、NO.28+10.90=20.0m
舗装版切断	アスファルト舗装版 15cm以下	28	m	NO.30=3.1m
建設汚泥	中間処理施設	0.032	t	$V=2.3 \times 10^{-2} \times t \times L$
舗装版破碎	小規模	1268	m ²	50mm
殻運搬 舗装版破碎	厚15cm以下	63	m ³	50mm
アスファルト塊		63	m ³	50mm
床掘り	土砂 小規模	101	m ³	80mm
土砂等運搬	小規模	101	m ³	80mm
積込(ルーズ)	小規模	101	m ³	80mm
土砂等運搬	小規模	101	m ³	80mm
残土処分費		101	m ³	80mm
舗装工			1 式	
不陸整正		1268	m ²	
上層路盤(車道・路肩部)	1層施工	1268	m ²	80mm
表層(車道・路肩部)	再生密粒度アスコン(13)	1268	m ²	50mm
仮設工			1 式	
交通誘導警備員B		27	人日	

数量計算書

川崎池谷線

		計算書			計算書			
測点	点間距離	打換之工 t=5cm			点間距離			
		断面	平均	面積		断面	平均	面積
No.7+14.6		5.20						
No.8	5.4	5.20	5.20	28.1				
No.9	20.0	5.20	5.20	104.0				
No.9+19.2	19.2	5.10	5.15	98.9				
No.10	0.8	6.00	5.55	4.4				
No.10+2.3	2.3	8.40	7.20	16.6				
								m2
小計	47.7			252.0	累計			252.0
累計	47.7		≒	252.0			≒	252.0

数量計算書

川崎池谷線

名称		数量	単位	備考
舗装打換え工				
土工			1 式	
舗装版切断	アスファルト舗装版 15cm以下	14	m	NO.7+14.6=5.2m、NO.10+2.3=8.4m
建設汚泥	中間処理施設	0.016	t	$V=2.3 \times 10^{-2} \times t \times L$
舗装版破碎	小規模	252	m ²	50mm
殻運搬 舗装版破碎	厚15cm以下	13	m ³	50mm
アスファルト塊		13	m ³	50mm
床掘り	土砂 小規模	20	m ³	80mm
土砂等運搬	小規模	20	m ³	80mm
積込(ルーズ)	小規模	20	m ³	80mm
土砂等運搬	小規模	20	m ³	80mm
残土処分費		20	m ³	80mm
舗装工			1 式	
不陸整正		252	m ²	
上層路盤(車道・路肩部)	1層施工	252	m ²	80mm
表層(車道・路肩部)	再生密粒度アスコン(13)	252	m ²	50mm
仮設工			1 式	
交通誘導警備員B		12	人日	