


数量計算書 高畑萩原線外舗装補修工事

打換え工 t=5cm

1工区 高畑萩原線

		計算書					計算書		
測点	点間距離	打換え工 t=5cm			点間距離				
		断面	平均	面積		断面	平均	面積	
No. 41		3.10							
No. 42	20.0	3.10	3.10	62.0					
No. 42+13.50	13.5	3.10	3.10	41.9					
No. 42+18.70	5.2	3.70	3.40	17.7					
No. 43	1.3								
No. 43+8.9	8.9	3.70							
No. 44	11.1	3.70	3.70	41.1					
No. 45	20.0	3.70	3.70	74.0					
No. 46	20.0	3.50	3.60	72.0					
No. 47	20.0	3.70	3.60	72.0					
		待避所 Bブロック数量参照							
				18.7					
No. 47+7.30	7.3	3.00	3.35	24.5					
No. 48	12.7	3.40	3.20	40.6					
No. 49	20.0	3.50	3.45	69.0					
No. 50	20.0	3.60	3.55	71.0					
No. 51	20.0	3.40	3.50	70.0					
No. 52	20.0	3.20	3.30	66.0					
No. 53	20.0	3.20	3.20	64.0					
No. 54	20.0	3.10	3.15	63.0					
No. 55	20.0	3.40	3.25	65.0					
No. 56	20.0	3.10	3.25	65.0					
No. 57	20.0	3.00	3.05	61.0					
No. 57+16.90	16.9	4.10	3.55	60.0					
No. 58	3.1	4.60	4.35	13.5					
No. 58+1.00	1.0	4.75	4.68	4.7					
No. 58+1.00'		4.45							
No. 58+3.60	2.6	5.20	4.83	12.5					
No. 58+6.30	2.7	3.70	4.45	12.0					
No. 59	13.7	3.00	3.35	45.9					
No. 60	20.0	3.00	3.00	60.0					
No. 61	20.0	3.80	3.40	68.0					
No. 62	20.0	2.60	3.20	64.0					
No. 63	20.0	2.50	2.55	51.0					
小計	440.0			1450.1					


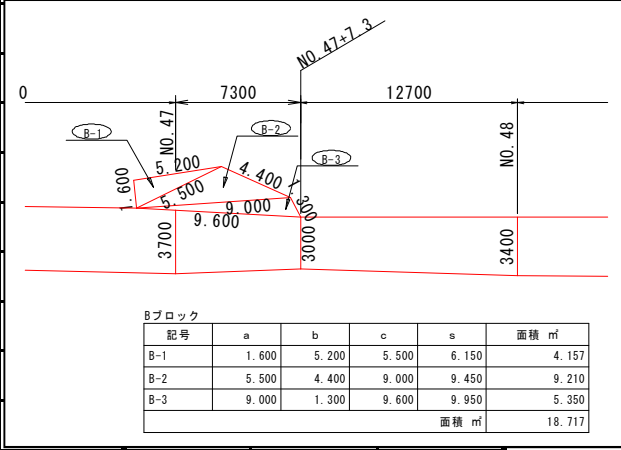


数量計算書 高畑萩原線外舗装補修工事

打換え工 t=5cm

1工区 高畑萩原線

		計算書			計算書			
測点	点間距離	打換え工 t=5cm			点間距離			
		断面	平均	面積		断面	平均	面積
No. 63		2.50						
No. 64	20.0	2.70	2.60	52.0				
No. 65	20.0	2.60	2.65	53.0				
No. 66	20.0	2.50	2.55	51.0				
No. 67	20.0	2.30	2.40	48.0				
No. 68	20.0	2.40	2.35	47.0				
No. 69	20.0	3.10	2.75	55.0				
No. 70	20.0	4.20	3.65	73.0				
No. 71	20.0	4.20	4.20	84.0				
No. 72	20.0	4.10	4.15	83.0				
No. 73	20.0	4.10	4.10	82.0				
No. 74	20.0	3.10	3.60	72.0				
No. 75	20.0	2.90	3.00	60.0				
No. 75+17.30	17.3	2.70	2.80	48.4				
No. 76	2.7	4.60	3.65	9.9				
No. 76+9.90	9.9	4.60	4.60	45.5				
No. 77	10.1	5.60	5.10	51.5				
No. 77+9.40	9.4	4.70	5.15	48.4				
		Cブロック数量参照		89.6				
No. 77+9.40'		4.10						
No. 78	10.6	3.00	3.55	37.6				
No. 79	20.0	3.00	3.00	60.0				
No. 80	20.0	2.60	2.80	56.0				
		Dブロック数量参照		7.6				
No. 81	20.0	3.00	2.80	56.0				
No. 81+18.20	18.2	4.70	3.85	70.1				
No. 82	1.8	4.60	4.65	8.4				
No. 82+3.30	3.3	4.00	4.30	14.2				
No. 82+5.20	1.9	5.70	4.85	9.2				
小計	385.2			1372.4				
累計	825.2			2822.5	No. 41~No. 82+5.2			
				≒ 2820.0				

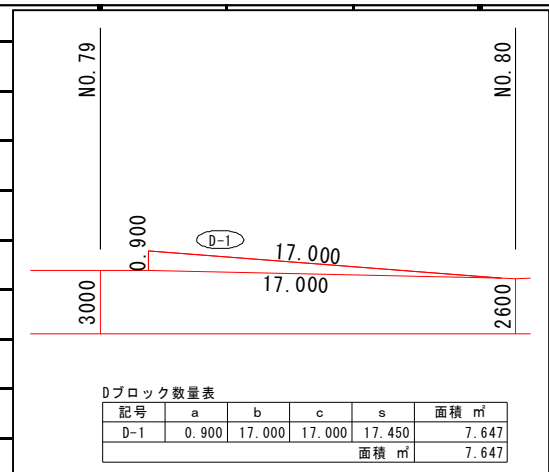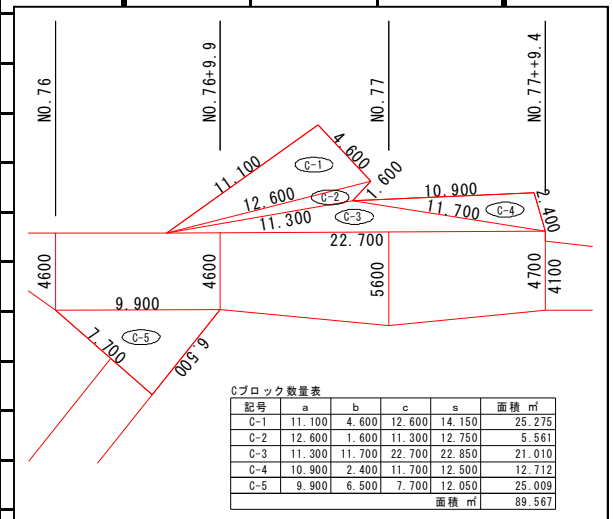

数量計算書 高畑萩原線外舗装補修工事

打換え工 t=5cm

2工区 池谷長田南1号線

		計算書				計算書		
測点	点間距離	打換え工 t=5cm			点間距離			
		断面	平均	面積		断面	平均	面積
No. 0		10.10						
No. 0 + 4.70	4.7	7.70	8.90	41.8				
No. 0 + 13.40	8.7	6.70	7.20	62.6				
No. 0 + 13.40	0.0	6.30	6.50	0.0				
No. 0 + 17.20	3.8	6.30	6.30	23.9				
No. 0 + 17.20	0.0	6.40	6.35	0.0				
No. 0 + 18.00	0.8	6.40	6.40	5.1				
No. 0 + 18.00	0.0	6.20	6.30	0.0				
No. 1	2.0	6.20	6.20	12.4				
No. 1 + 4.80	4.8	6.10	6.15	29.5				
No. 1 + 4.80	0.0	6.10	6.10	0.0				
No. 2	15.2	6.30	6.20	94.2				
No. 3	20.0	6.10	6.20	124.0				
No. 4	20.0	6.20	6.15	123.0				
No. 5	20.0	6.00	6.10	122.0				
No. 5 + 8.60	8.6	6.60	6.30	54.2				
No. 5 + 12.10	3.5	9.00	7.80	27.3				
No. 5 + 14.40	2.3	12.30	10.65	24.5				
No. 5 + 16.70	2.3	21.40	16.85	38.8				
小計	116.7			783.3				
累計	116.7		=	783.0	No. 0~No. 5+16.7			
			≒	783.0				

区画線工	色	線幅	延長等
外側線（西側）	白	12cm	116m
外側線（東側）	白	12cm	100m
横断歩道（北側）	白	45cm	2.6m×11本
停止線（北側）	白	45cm	2.6m
横断歩道（南側）	白	45cm	2.0m×7本
停止線（南側）	白	45cm	2.6m
文字	白	15cm	11.6m 止まれ
文字両側線	白	30cm	15m 7.5m×2

数量計算書 高畑萩原線外舗装補修工事

打換え工 t=5cm

3工区 東馬詰泉の尻東西線

		計算書				計算書		
測点	点間距離	打換え工 t=5cm			点間距離			
		断面	平均	面積		断面	平均	面積
No. 0		2.30						
No. 1	20.0	2.50	2.40	48.0				
No. 1 + 7.90	7.9	2.60	2.55	20.1				
No. 1 + 11.30	3.4	2.60	2.60	8.8				
No. 2	8.7	2.10	2.35	20.4				
No. 3	20.0	2.40	2.25	45.0				
No. 4	20.0	2.50	2.45	49.0				
No. 5	20.0	2.60	2.55	51.0				
No. 6	20.0	2.10	2.35	47.0				
No. 6 + 5.10	5.1	2.10	2.10	10.7				
No. 6 + 6.30	1.2	3.00	2.55	3.1				
No. 6 + 9.30	3.0	2.60	2.80	8.4				
No. 6 + 10.60	1.3	2.10	2.35	3.1				
No. 7	9.4	2.70	2.40	22.6				
No. 7 + 11.90	11.9	2.60	2.65	31.5				
No. 7 + 13.00	1.1	3.70	3.15	3.5				
No. 7 + 16.30	3.3	3.50	3.60	11.9				
No. 7 + 16.30	0.0	3.20	3.35	0.0				
No. 7 + 18.30	2.0	3.30	3.25	6.5				
No. 7 + 18.30	0.0	2.70	3.00	0.0				
No. 8	1.7	3.00	2.85	4.8				
No. 8 + 2.90	2.9	3.40	3.20	9.3				
No. 8 + 2.90	0.0	4.00	3.70	0.0				
No. 9	17.1	3.30	3.65	62.4				
No. 10	20.0	3.30	3.30	66.0				
No. 10 + 19.30	19.3	3.40	3.35	64.7				
小計	219.3			597.8				
累計	219.3		=	597.8	No. 0~No. 10+19.3			
			≒	598.0				